


Product data sheet

MSW sliding swing door with stop function – fine-framed

Access element for closed glass partitioning walls

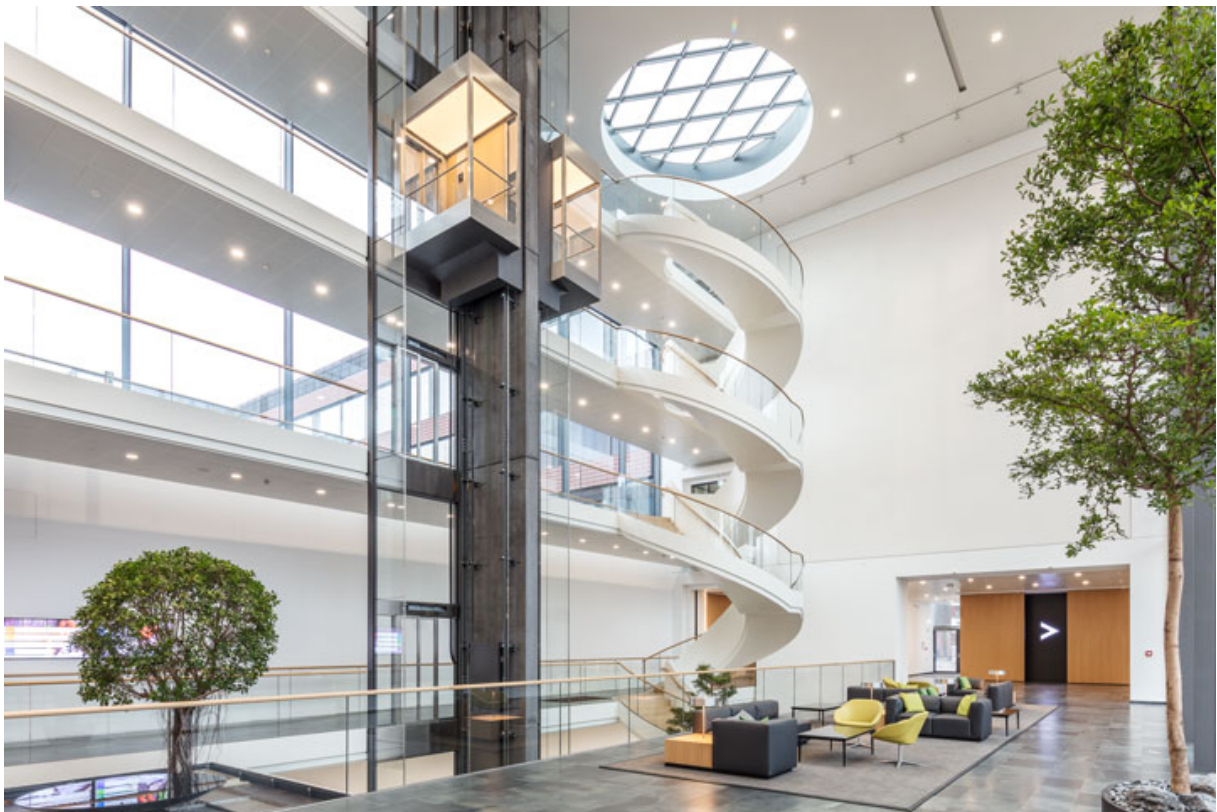

Product features

- Horizontal and vertical profiles for glass framing
- Toughened safety glass ESG 10 mm flush on one side
- Insulating glass 22 mm centred applicable
- Element weight up to 125 kg
- Integrated locking facility (Boxer 2-4V)
- Dry glazing by means of circumferential glazing gasket
- Can be combined with all other element types – fine-framed

Application Areas

- Internal and protected external area
- Freely selectable position in the system front
- Applicable up to 3000 mm clear height
- Applicable up to 1100 mm element width