
Product data sheet

FT200--B *

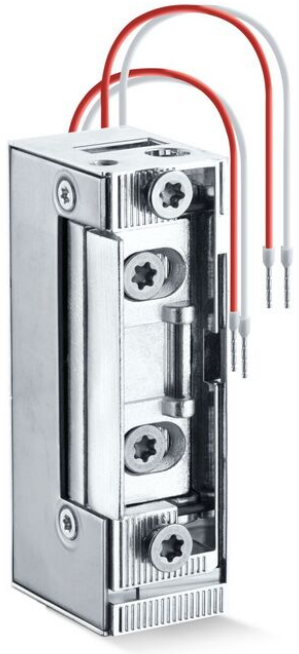

Electric strike with basic configuration

AREAS OF APPLICATION

- → Fire protection doors with swing door drives
- → Can be installed on left hand and right hand doors as well as vertically or horizontally
- → Connection to direct or alternating current

GEZE GmbH | Reinhold-Vöster-Straße 21–29 | D-71229 Leonberg | **TEL** +49 7152 203-0 | **WEB** www.geze.de | **Mail** info.de@geze.com
2026-11-21T05:12:23Z

FT200--B *

PRODUCT FEATURES

- Approved for smoke and fire protection doors
- Almost silent opening behaviour with direct current with one click
- Twin coil technology enables a larger operating voltage range
- Integrated bipolar EMC protective diode which protects connected electronic components against reverse voltage
- Adjustable radius latch by 4 mm, in 1 mm pitch

TECHNICAL DATA

Productname	FT200--B *
Dimensions	20.5 x 69 x 28 mm
DIN direction	left / right
Set position x grid dimension	5 x 1 mm
Latch engagement depth	6 mm
Installation position vertical / horizontal	Yes
Fail-safe	No
Fail-secure	Yes
Dummy strike	No
Continuous operation voltage	12V / 24V AC/DC
Approval for smoke protection doors	Yes
Suitability for fire protection doors	Yes
Mechanical release	No
Bipolar EMC protection diode integrated	Yes
Twin coil technology	Yes

* The products designated above may vary in form, type, characteristics, function, or availability depending on the country. Please get in touch with your GEZE contact person if you have any questions.